


# HYBRID FLOORING


**StoneCore**  
Hybird

**EWF**  
*Elite Wooden Floors*  
ESTD 2021


BOARD SIZE: 650mm x127mm x 9mm PACK SIZE: 1.486M2

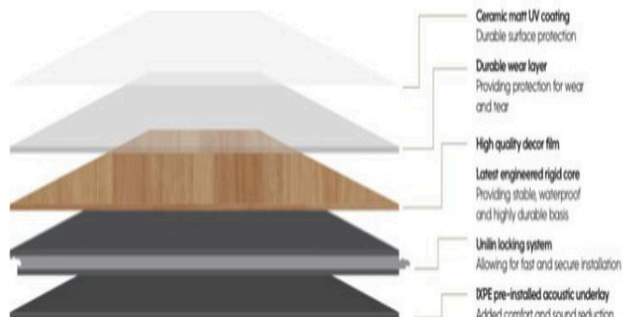

0.5mm Commercial Grade Ceramic Coating	Unilin Click system
AC4 Wear rating	Domestic Pet Suitable
+ION +ION antimicrobial technology	No acclimatization necessary
100% Water Proof	Formaldehyde Free
5 Star Acoustic Rating*	

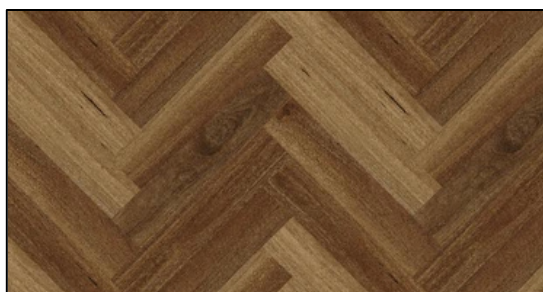


**Herringbone  
Nsw Spotted Gum**

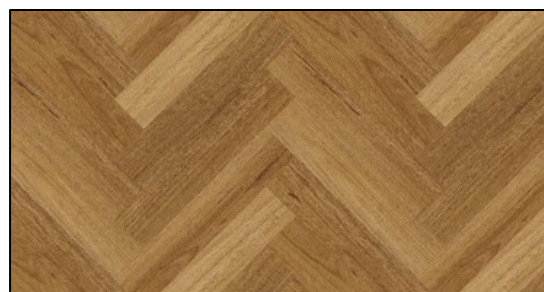


**Herringbone  
Native Blackbutt**



**Herringbone  
Pale Oak**

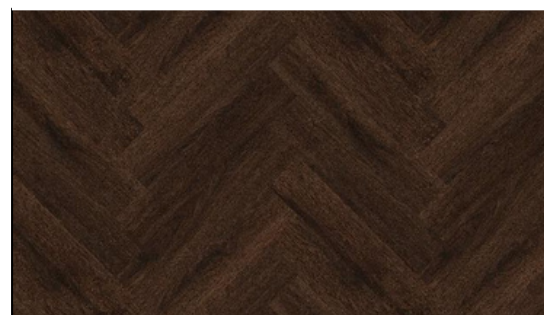

**Herringbone  
Majestic**

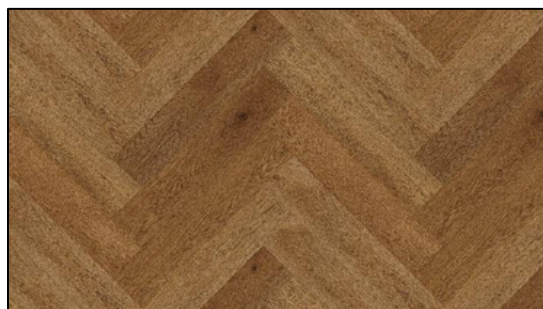

**Herringbone  
Blonde Oak**

**EWF**  
*Elite Wooden Floors*

ESTD 2021

# Technical specifications

Attributes	Standard	Result
Type of floor covering	Hybrid / Rigid core	
Installation	Unilin Click System	
Core	SPC	
Colours	5	
Size	650mm x 127mm	
Thickness	9.0mm	
Core thickness	7.0mm	
Wear layer	0.5mm	
Surface Features	Embossed	
Backing	2mm Acoustic underlay	
Packaging	18 Planks / pack = 1.486m <sup>2</sup>	
Total weight	8.75kg/m <sup>2</sup> / 17.5kg per pack	
Beveled edge	Micro Bevel Edges	
Classification	ISO 10874 / EN 685 Commercial: light ISO 10874 / EN 685 Domestic: heavy	
Reaction to fire	AS/NZ ISO9239 1-2003 CHF: ≥10.05kW/m <sup>2</sup> Smoke value: 132%.min	
Slip resistance	AS 4586:2013 Appendix A P3	
Dimensional stability	Heat at 60°C for 24 hours Length: -0.8% Width: -0.09%	
Acoustic impact noise reduction	AS/NZ ISO 717.2-2004 FIIC4,5 = 61 L'nTw3 = 41 AAAC 5 Star Rating1	Suitable for hydronic underfloor heating,
Underfloor heating	max. 27°C Compliant for VOC	
VOC Emissions ASTM D5116-17	Yes Green Building Council of Australia	
Phthalate Free	Not detected	
Quartz content (wt%)	10 Years warranty*	
Warranty Commercial	25 Years warranty*	
Domestic		