


HYBRID FLOORING

StoneCore

EWF
Elite Wooden Floors
ESTD 2021


BOARD SIZE: 650mm x 127mm x 9mm PACK SIZE: 1.486M2

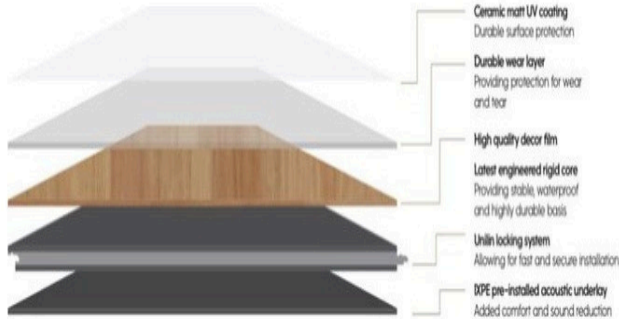


0.5mm Commercial Grade Ceramic Coating	Hybrid	Unilin Click system
AC4 Wear rating		Domestic Pet Suitable
+ION +ION antimicrobial technology		No acclimatization necessary
100% Water Proof		Formaldehyde Free
5 Star Acoustic Rating*		




Herringbone
Nsw Spotted Gum

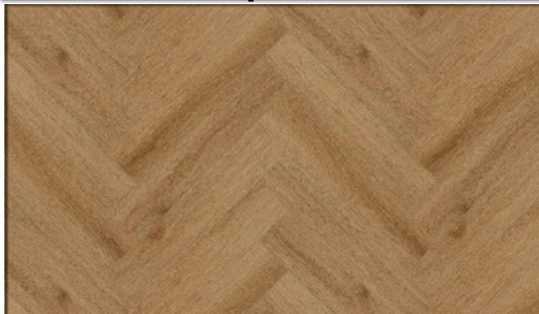


Herringbone
Pale Oak

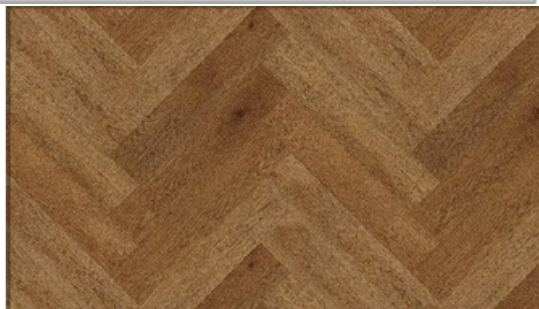

Herringbone
Blonde Oak

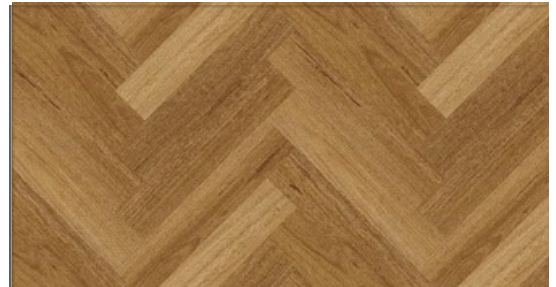

Herringbone
Native Blackbutt

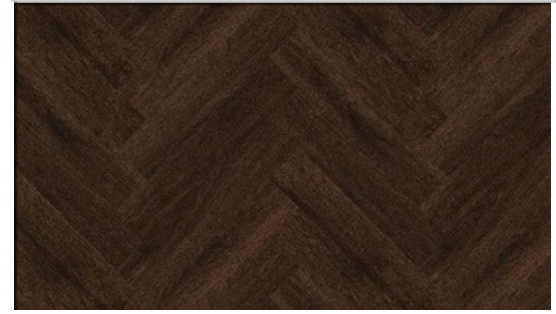

Herringbone
Majestic

EWF
Elite Wooden Floors

ESTD 2021

Technical specifications



ESTD 2021

Herringbone Collection

Attributes	Standard	Result
Type of floor covering	Hybrid / Rigid core Unilin Click System SPC 5	
Installation	650mm x 127mm 9.0mm 7.0mm 0.5mm	
Core	Embossed 2mm Acoustic underlay 18 Planks	
Colours	/ pack = 1.486m ² 8.75kg/m ² / 17.5kg per pack	
Size	Micro Bevel Edges ISO 10874 / EN 685	
Thickness	Commercial: light	
Core thickness	ISO 10874 / EN 685 Domestic: heavy	
Wear layer	AS/NZ ISO9239 1-2003 CHF: ≥10.05kW/m ²	
Surface Features	Smoke value: 132%.min	
Backing	AS 4586:2013 Appendix A P3	
Packaging	Heat at 60°C for 24 hours Length: -0.8%	
Total weight	Width: -0.09% AS/NZ ISO 717.2-2004	
Beveled edge	FIIC4,5 = 61	
Classification	L'nTw3 = 41	
	AAAC 5 Star Rating1	
Reaction to fire		
Slip resistance		
Dimensional stability		
Acoustic impact noise reduction		
		Suitable for hydronic underfloor heating,
Underfloor heating	max. 27°C Compliant for VOC	
VOC Emissions ASTM D5116-17	YGesre en Building Council of Australia	
Phthalate Free	Not detected	
Quartz content (wt%)	10 Years warranty*	
Warranty Commercial	25 Years warranty*	
Domestic		

Note: Builder's plastic must be laid before installing hybrid flooring.



ESTD 2021

Elitewoodenfloors.com.au

706 Burke Road, Camberwell | 03 91915265 | sales@elitewoodenfloors.com.au | www.elitewoodenfloors.com.au