


A modern interior hallway with light wood flooring. On the left is a wall of vertical brass-colored slats. In the center, a wooden cabinet with three doors featuring circular sunburst patterns sits against a white wall. Above it is a large abstract painting with black and white brushstrokes. To the right, a curved console table with a white top and a black and wood base is positioned against a wall of stacked light-colored stone blocks. On the console are several brass-colored vases and a small plant. The ceiling is white with a recessed section on the right.

**Australia's Most
Beautiful Floors**



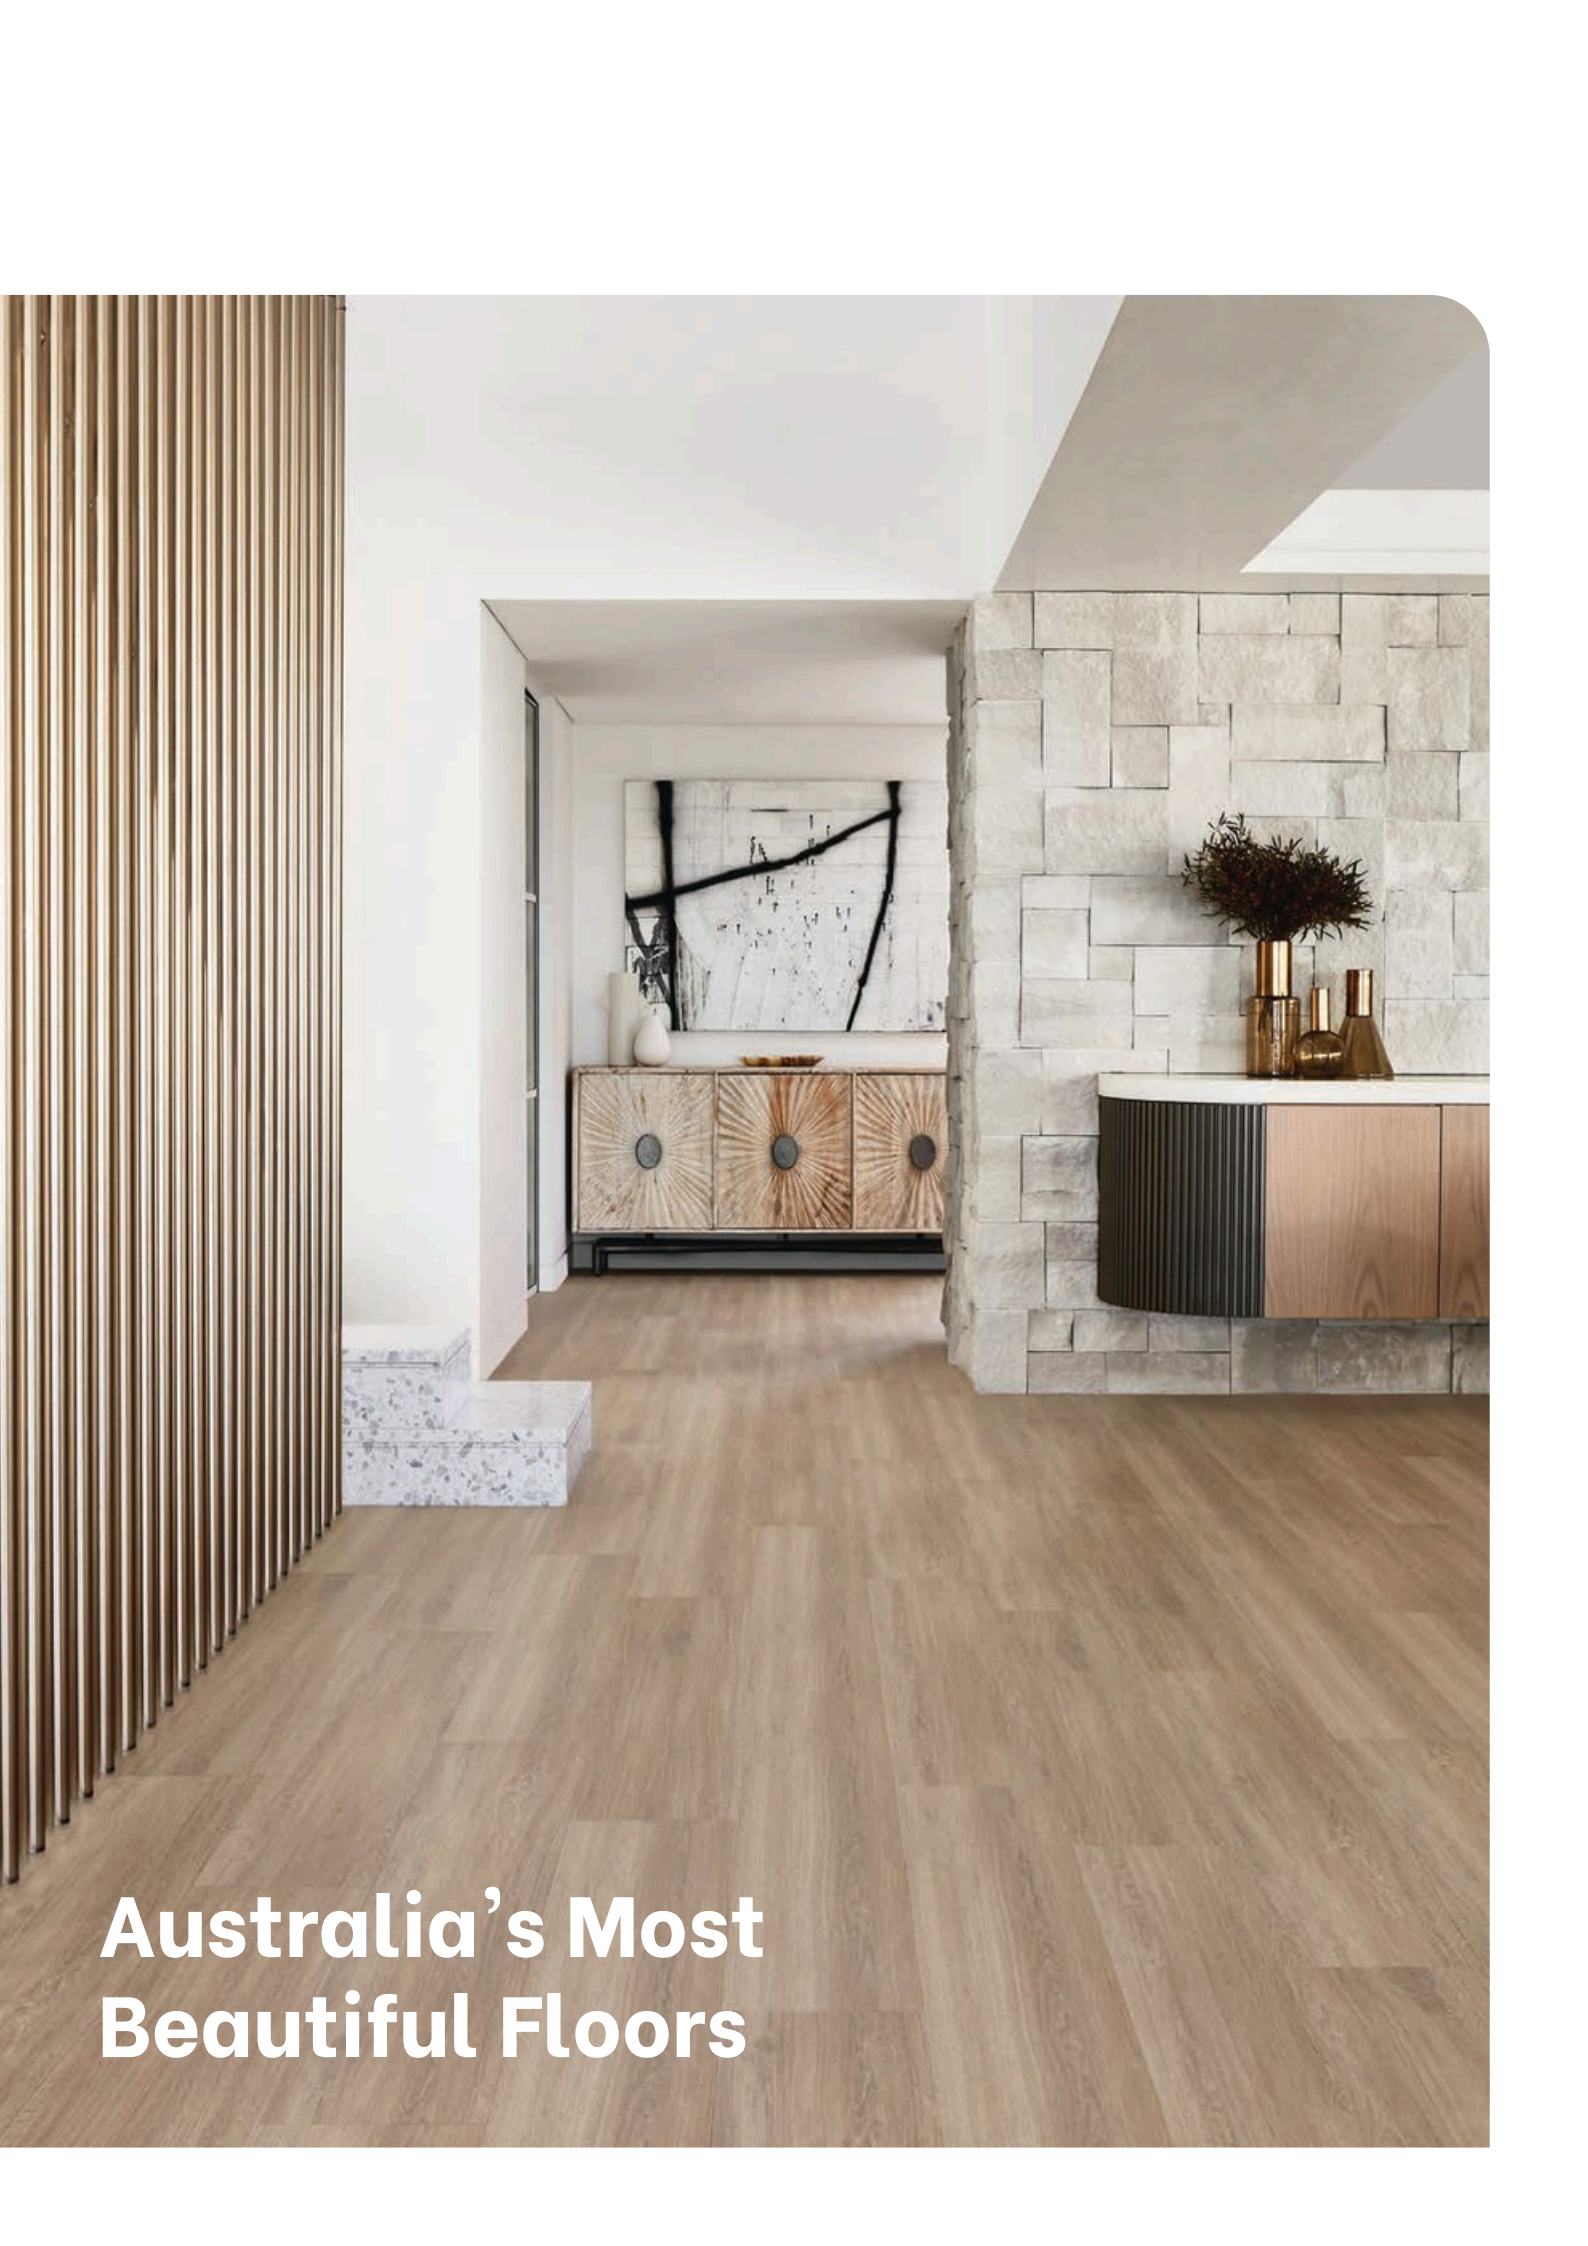

Standout Look, Amazing Features

Easi-Plank SPC Hybrid is a robust and durable flooring choice for modern interiors. Due to its unique stone polymer composite (SPC) construction Easi-Plank delivers interior water resistant attributes providing ultimate peace of mind for everyday residential living.

The visual décor layers feature realistic timber textures and colours in both classic Australian Timber and a contemporary colour palette. The planks also display an attached acoustic IXPE foam layer that delivers excellent sound dampening capabilities. Wide Plank & Herringbone parquetry formats available.

Exceeds the National Construction Code (NCC)

for acoustic sound level ratings in Multi Residential apartments. 5 Star rated. Easi-Plank will resist common household incidental stains & spillage.



Interior Water
Resistant



LIMITED
LIFETIME

Structural
Warranty



20
YEARS

Finish
Warranty

HERRINGBONE PORCELAIN

Unique Features

TOUGH & DURABLE


Easi-Plank Hybrid flooring is a tough and durable choice for interior installations. Due to its unique stone polymer composite (SPC) construction and vinyl wear layer Easi-Plank is an excellent all-round option for everyday residential living. A great selection of colours in wide plank & herringbone parquetry.

TOPICAL WATER RESISTANT

Easi-Plank flooring provides good dimensional stability with a hard wearing surface to handle the bumps and grinds expected within the home environment. It's ideal for new installs or renovations including surfaces over existing ceramic tiles. The wide plank features a 0.5mm vinyl wear layer, our Herringbone Parquetry features a 0.7mm vinyl wear layer. Sub-floor prep and moisture barrier will be required. Check local building regulations for suitable areas of use within the home or apartment.





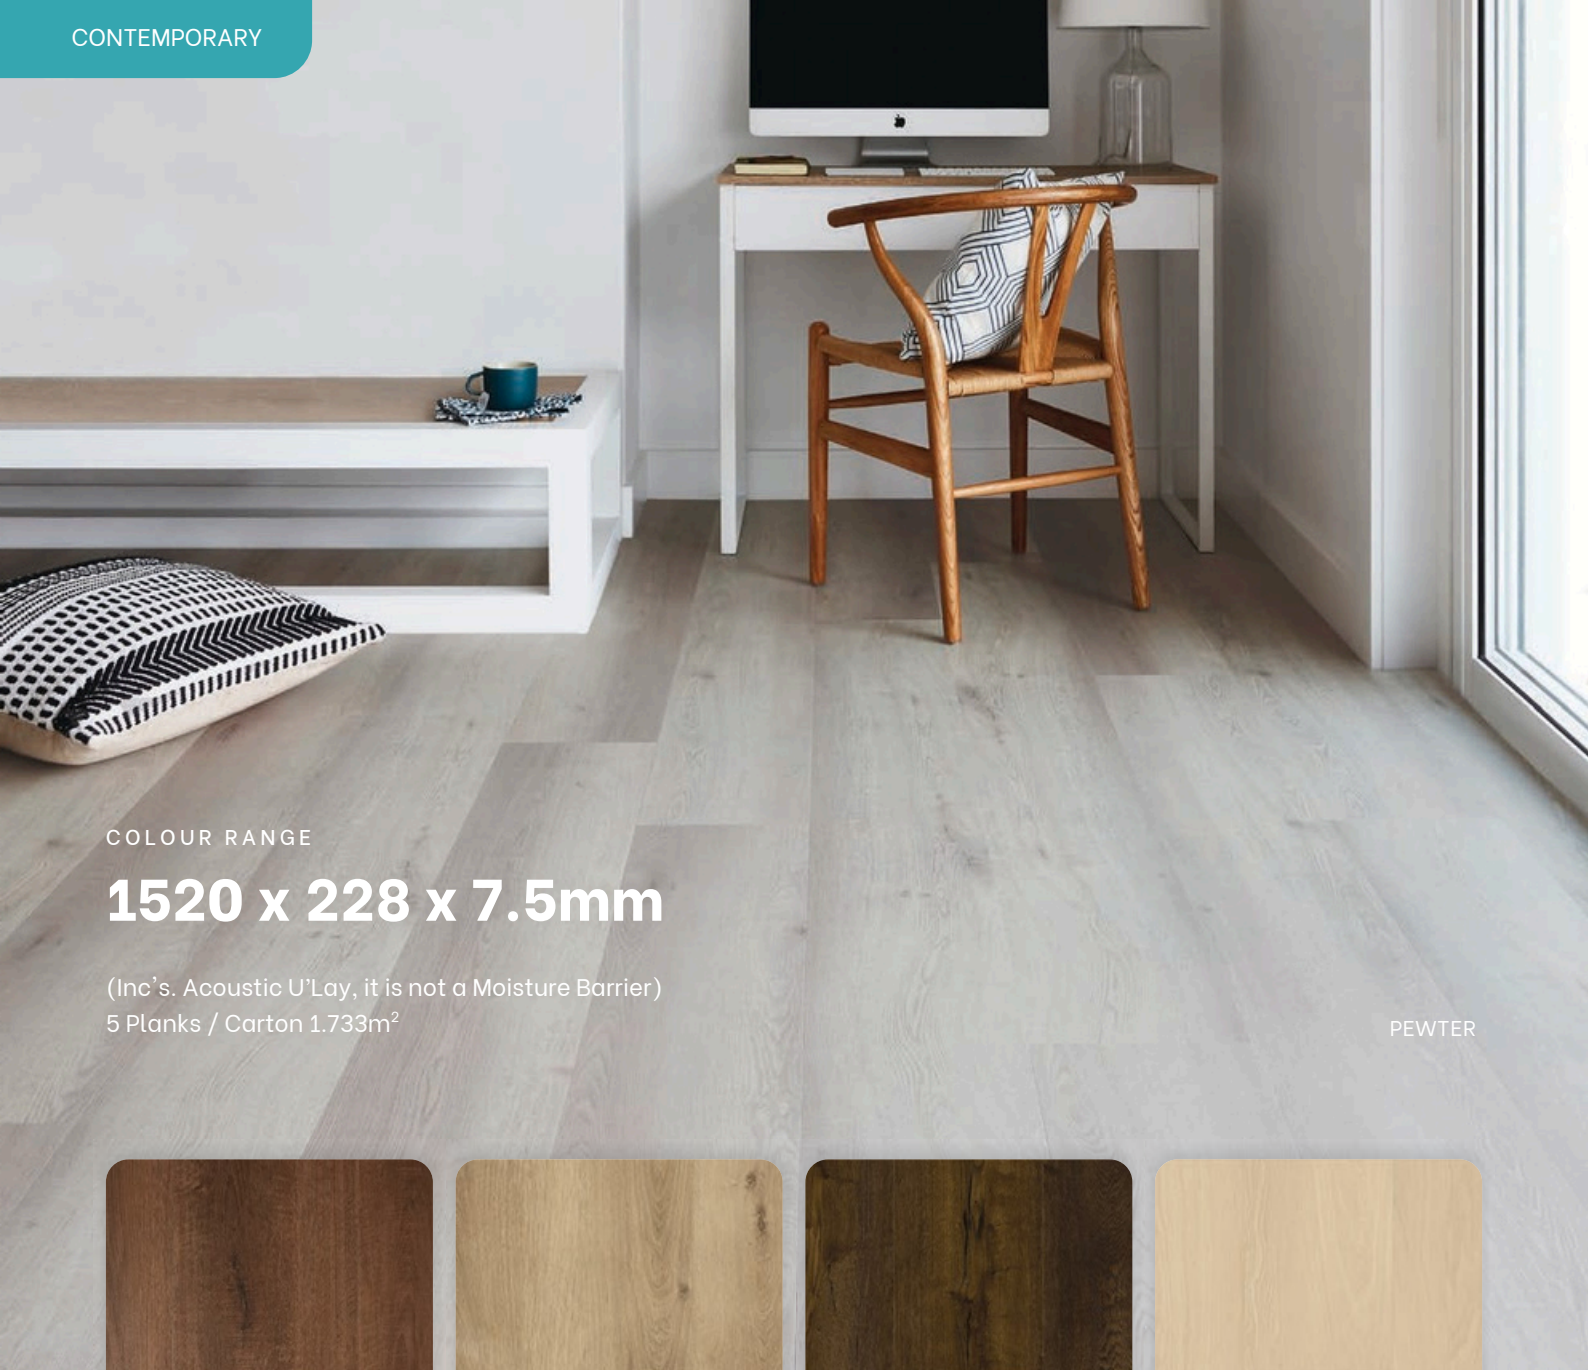

COLOUR RANGE

1520 x 228 x 7.5mm

(Inc's. Acoustic U'Lay, it is not a Moisture Barrier)
5 Planks / Carton 1.733m²

PEWTER





SILVER GREY





COLOUR RANGE






1520 x 180 x 7.5mm

(Inc's. Acoustic U'Lay, it is not a Moisture Barrier)

6 Planks / Carton 1.642m²

*Note: Classic Spotted Gum Only, available
in 228mm width - 5 planks / Carton 1.733m².*

NATURAL BLACKBUTT

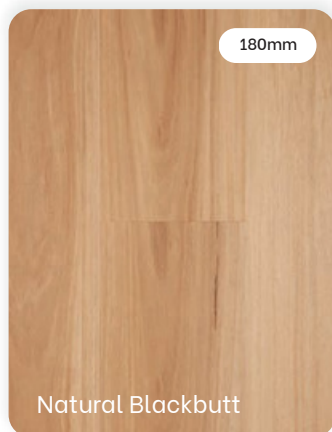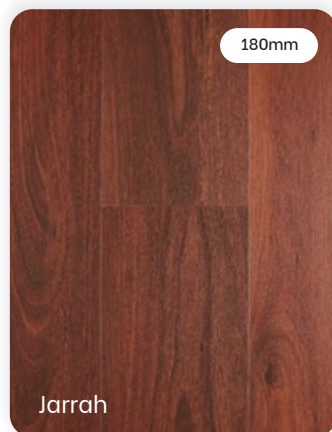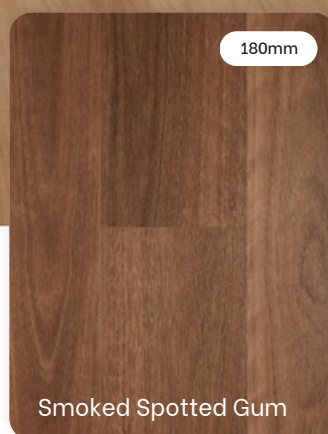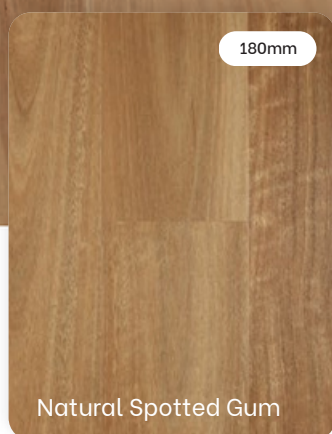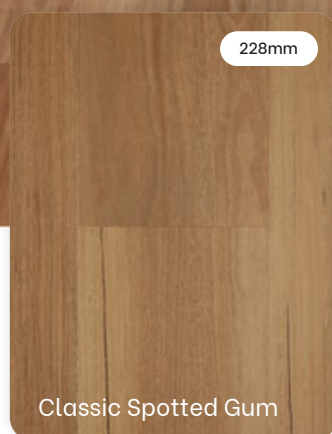

COLOUR RANGE


625 x 125 x 8mm

(Inc's. Acoustic U'Lay, it is not a Moisture Barrier)
 14 Planks/Carton 1.094m², A&B marked for easy assembly

HERRINGBONE PORCELAIN




HB Barnside

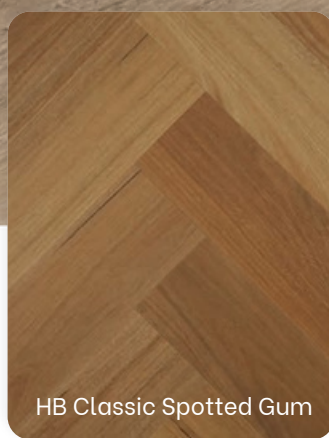


HB Classic Spotted Gum



HB Grey Stone

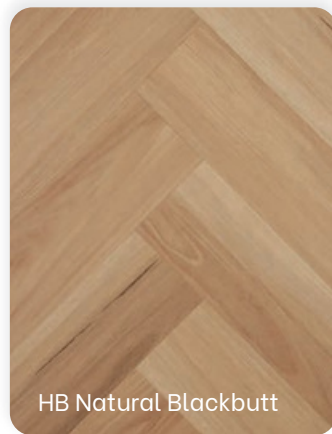

HB Natural Blackbutt

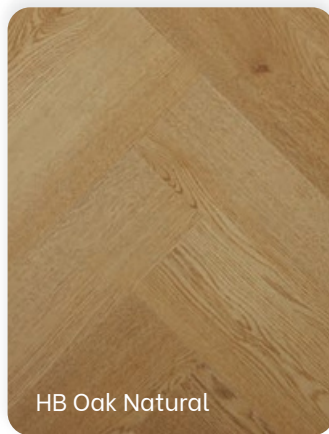


HB Oak Natural



HB Pewter



HB Porcelain

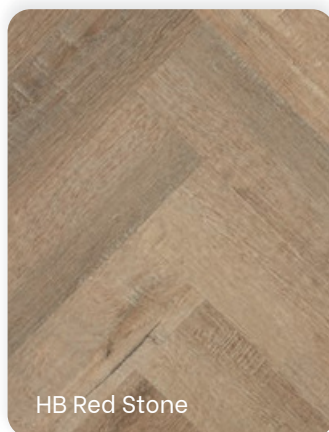

HB Red Stone



HB Wheat

*Images for illustrative purposes only, batch and grade variations will occur.
 Visual knots and other natural characteristics can be included.*

Technical Specifications

DESCRIPTION & PROFILE

Stone Polymer Composite (SPC) construction.

Unilin click profile. Micro Bevel Edges, V4.

SURFACE FEATURES

Realistic timber visuals, on-trend colours and textures.

Water based Matte coating.

SLIP & FIRE TEST

AS 4586:2013 Appendix A, slider 96 Wet Pendulum P4.

CHF Value, 10.5 kWm². Smoke Value, 90% minutes.

VOC EMISSIONS

< E1, FloorScore Certified

SCS-EC10.3-2014 v4.0.

SIZES

Planks:

1520 x 228 x 7.5mm,

1.733m²/ Ctn, 5 planks – 0.5mm Wear Layer

1520 x 180 x 7.5mm,

1.642m²/ Ctn, 6 planks – 0.5mm Wear Layer

Herringbone:

625 x 125 x 8mm, A&B marked,

1.094m²/ Ctn, 14 pieces – 0.7mm Wear Layer

ACOUSTIC VALUE

L_{nT,w} 42 – AAAC⁵ star rating, 5 Star,

Complies with NCC/BCA

WARRANTY

25 Year Limited Lifetime Structural Warranty

20 Year Limited Lifetime Residential Wear Warranty

5 Year Limited Lifetime Commercial Warranty

For warranty support our hybrid floors must be installed with 200µm builders' film on all subfloors to impede either moisture from below or concrete vapour ingress. Installation guidelines including perimeter & room to room expansion requirements must be followed for warranty compliance. The IXPE underlay is acoustic only, it is not a moisture barrier.





PORCELAIN

HERRINGBONE & WIDE PLANK

