



Engineered Herringbone Prime Grade | 15/3mm



15/3mm

Thickness




15mm
Prime



15mm
Prime

Elite Wooden Floors

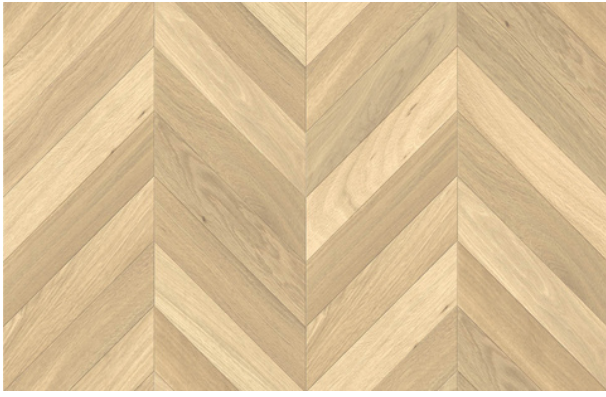

Mellow Beige




Terrace Grey



Acorn Brown



Antique White

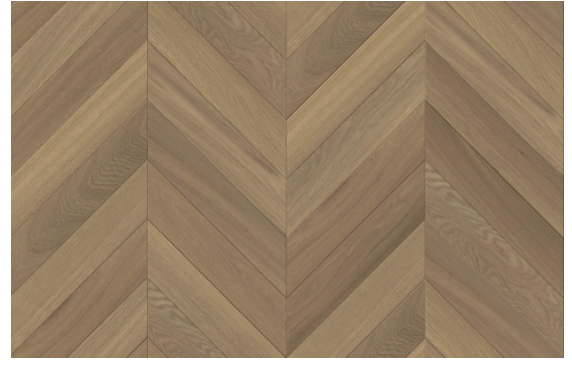

Tan Brown

| Specification | Details |
|---------------------|-----------------------|
| Timber Grade | Prime |
| Dimension | 600 x 120 x 15 mm |
| Top Layer | 3 mm |
| Surface Finish | Brushed UV Lacquer |
| Edges | 4 Sided Micro Bevel |
| Joining System | Tongue and Groove |
| Moisture Content | 8-12% |
| Installation Method | Direct Stick |
| Slip Resistance | P3 |
| CHF Value | 3.7 kW/m ² |
| Smoke Value | 64% min |
| Pack Size | 1.152 m ² |
| Nesting | 0% Random |



15/3mm
Thickness



15mm
Prime



15mm
Prime