


# StoneCore HYBRID FLOORING

BOARD SIZE : 1524mm x 228mm x 7mm

PACK SIZE : 2.085/m<sup>2</sup>

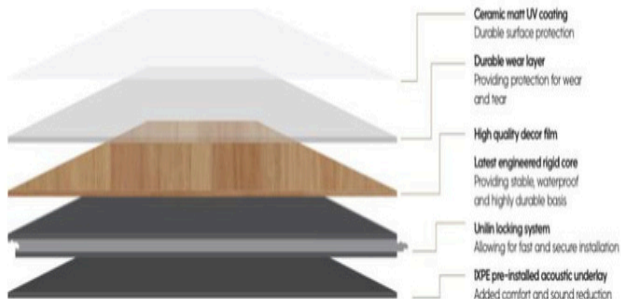

StoneCore  
Hybird — by Elite wooden floors

0.5mm Commercial Grade Ceramic Coating	Unilin Click system
AC4 Wear rating	Domestic Pet Suitable
+ION +ION antimicrobial technology	No acclimatization necessary
100% Water Proof	Formaldehyde Free
5 Star Acoustic Rating*	



## Technical specifications

Attributes	Standard	Result
Type of floor covering		Hybrid / Rigid core
Installation		Unilin Click System
Core		SPC
Colours		10
Size		1524mm x 228mm
Thickness		7.0mm
Core thickness		5.0mm
Wear layer		0.5mm
Surface Features		Embossed
Backing		2mm Acoustic underlay
Packaging		6 Planks / pack = 2.085m <sup>2</sup>
Total weight		9.75kg/m <sup>2</sup> / 19.5kg per pack
Beveled edge		Micro Bevel Edges
Classification	ISO 10874 / EN 685 ISO 10874 / EN 685	Commercial: light Domestic: heavy
Reaction to fire	AS/NZ ISO9239 1-2003	CHF: ≥10.08kW/m <sup>2</sup> Smoke value: 136%.min P3
Slip resistance	AS 4586:2013 Appendix A	Length: -0.9%
Dimensional stability	Heat at 60°C for 24 hours	Width: -0.08% FII C4,5 = 62
Acoustic impact noise reduction	AS/NZ ISO 717.2-2004	L'nTw3 = 43 AAAC 5 Star Rating1 Suitable for hydronic underfloor heating,
Underfloor heating		max. 27°C Compliant for VOC
VOC Emissions	ASTM D5116-17 Green Building Council of Australia Phthalate Free	Yes Not detected
Quartz content (wt%)		10 Years warranty*
Warranty	Commercial Domestic	25 Years warranty*

IEWIF