


A classic range of timber floors built for every Australian home. Suitable for floating or direct stick installations, the drop-lock system with wax finished joints provides a strong, quick and easy to lay strong flooring system. The multi-layer hardwood core creates a high-density structure backed by life-time structural warranty. This oak veneer layer achieves affordable and durable traditional oak finish.



- Banfert LED UV-Cured Coating
- FSC Certified Sustainable Sourced European Oak
- Micro Bevel
- Droplock click system
- Wax coated joints
- Multi-layer Hardwood Core
- Birch base ply

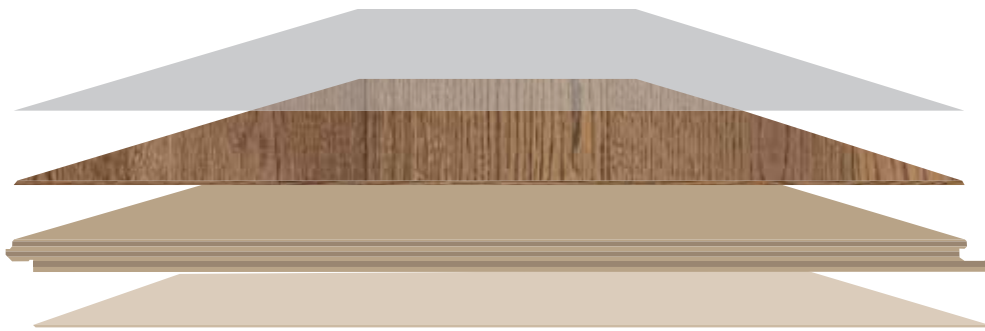

E3120



E3121



E3122



E3123



E3124



E3125



E3126



E3127



E3128



E3129

- 
5 star Acoustic rating*
- 
Drop Lock Click System
- 
Suitable for underfloor Heating (see warranty)
- 
Formaldehyde Free
- 
VOC Free
- 
FSC Certified Sustainably Sourced Timber

PLANK SIZE: 1900 x 190 x 14mm BOX (6pcs): 2.166sqm Nested boards: 30%

We recommend 8mm expansion gaps to walls, cabinetry & fixed furnishings.



20 Year Residential Warranty



5 Year Commercial Warranty

TECHNICAL SPECIFICATIONS

Specification

Wear Layer
 Timber Grade: ABCD
 Natural timber colour variation
 Thickness: 2mm
 Finish: Various
 UV Coating 8 layer

Structure

8 Layer multi-ply
 Eucalyptus core
 (European Oak)

Joins

Lock System: Droplock
 Join Treatment: Waxed
 Edge Treatment: Micro Bevel

1900 x 190 x 14/2mm

6 Boards
 2.12sqm
 30% Short planks
 22kg

Warranty

Residential 20 Year Wear
 Lifetime Structural
 Commercial 5 Year Wear
 Lifetime Structural

Test Data

Emission Test ASTM
 D5116-2017
 - VOC Pass
 - Formaldehyde Emission Pass

Reaction to fire tests

- CHF Value	3.1 KW/m ² Mean
- HF-30 Value	3.4 KW/m ² Mean
- Smoke Value	16 %.min Mean
Blistering	Yes
Penetration of flame through to substrate	Yes

Acoustic Test

Tested to:
 AS ISO 140.6-2006 and ISO 10140
 Part 3 (2010)
 AS ISO 717.2 (2004) Part 2
 Certification available on request.

Slip Resistance Classification

Wet Pendulum P2